

## SPECIFICATION DATA SHEET

The Classic Collection from Adorn Laminates combines striking visual appeal with exceptional durability. Offering a premium look at a cost-effective price, this range is perfect for enhancing any interior space.

Available in a versatile selection of contemporary colours, it provides creative freedom to complement any style. Made for everyday living, the Classic Collection features an AC4 abrasion rating, making it scratch resistant and hard-wearing. It also includes everyday water resistant protection, designed to handle the occasional household spill or splash with ease; ideal for residential spaces.

Well suited to high traffic areas such as entryways, kitchens, family rooms, and playrooms. With a low maintenance, easy-to-clean surface, this range is both a practical and stylish choice for busy households.


### Product Details

<b>Board Style</b>	Plank
<b>Board Thickness</b>	12 mm
<b>Board Size</b>	1215 x 197 mm
<b>Edge Profile</b>	Micro Bevelled
<b>Locking System</b>	Uniclic
<b>Installation Method</b>	Floating only
<b>Sqm/ Box</b>	1.915 m <sup>2</sup>
<b>Pieces / Box</b>	8
<b>Box / Pallet</b>	50
<b>Weight / Box</b>	20 kg
<b>Suitable Application</b>	Residential & Light Commercial

### Performance & Safety Testing

<b>Slip (AS 4586-2013)</b>	P2 (SRV 31)
<b>Fire (AS ISO 9239.1-2003)</b>	7.8 kW/m <sup>2</sup>
<b>Acoustic Outcome</b>	L'nTw 44 (2 mm Green underlay)
<b>AAAC Rating</b>	5 Star

Reports are available upon request.

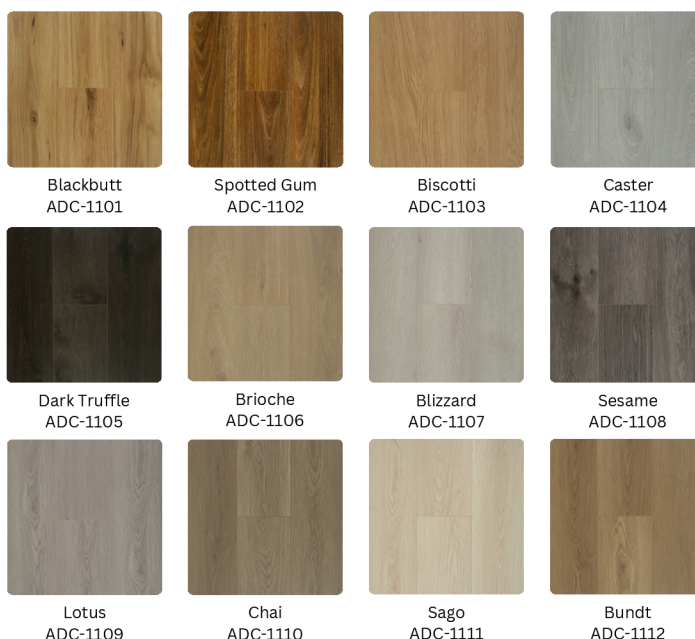

Images are for general illustration only. Actual product colours may differ due to variations in screen displays or printing processes. The scale of the images does not reflect true colour variation. For an accurate representation, please refer to physical samples. Images are not legally binding.

## Technical Summary

<b>Abrasion Rating</b>	AC4
<b>Surface Finish</b>	RealFeel Texture Matte
<b>Wear Layer</b>	Multi Layer Aluminium Oxide
<b>Decorative Layer</b>	HD Natural Wood Grain
<b>Pattern Repeats</b>	6-12 Patterns
<b>Core Structure</b>	High Density Fibreboard
<b>Backing Layer</b>	Moisture Resistant Melamine
<b>Thickness Swelling</b>	≤12 %
<b>Water Resistance</b>	Up to 12 hours
<b>Density</b>	850 kg/m <sup>3</sup>
<b>Formaldehyde Test</b>	Method: ASTM D6007-14
<b>Formaldehyde Result</b>	0.06 ppm (per million parts of air)
<b>Environmental</b>	Sourced from sustainable managed resources



This specification data sheet has been prepared by National Select Floors. All information provided was accurate at the time of writing and publication. National Select Floors reserves the right to alter product details at any time without prior notification. Images included are for illustrative purposes only and do not confer any rights or guarantees.

National Select Floors recommends installation by a professional flooring contractor or skilled tradesperson and must follow the Australian Standards for flooring installations. All installations must also be performed in accordance with National Select Floors installation guidelines. If you have any concerns regarding the installation process, please contact your reseller.

Installation guidelines and Warranty information are available from our website.