

SPECIFICATION DATA SHEET

The Select Range is a premium laminate flooring that captures the natural beauty, texture, and durability of real hardwood. Designed to suit both modern and traditional interiors, this range features elegant grain patterns and a variety of contemporary colours and finishes; delivering comfort, style, and sophistication underfoot.

Crafted for everyday living, the Select Range includes waterproof surface protection, making it ideal for handling life's unexpected spills. Its long and wide board design, combined with a patented Uniclic system, ensures quick, secure installation and a quality finish.

Built to last, these floors boast an AC5 wear rating, offering exceptional resistance to heavy traffic and daily wear. Whether for a bustling home or a high traffic commercial space like a retail store, the Select Range delivers on both performance and beauty.

Product Details

Board Style	Plank
Board Thickness	10 mm
Board Size	1845 x 235 mm
Edge Profile	Micro Bevelled
Locking System	Uniclic
Installation Method	Floating only


Sqm/ Box	2.602 m ²
Pieces / Box	6
Box / Pallet	64 / 80
Weight / Box	22.5 kg

Suitable Application	Residential & Commercial
-----------------------------	--------------------------

Performance & Safety Testing

Slip (AS 4586-2013)	P2 (SRV 30)
Fire (AS ISO 9239.1-2003)	11 kW/m ²
Acoustic Outcome	L'nTw 45 (2 mm Green underlay)
AAAC Rating	5 Star

Reports are available upon request.

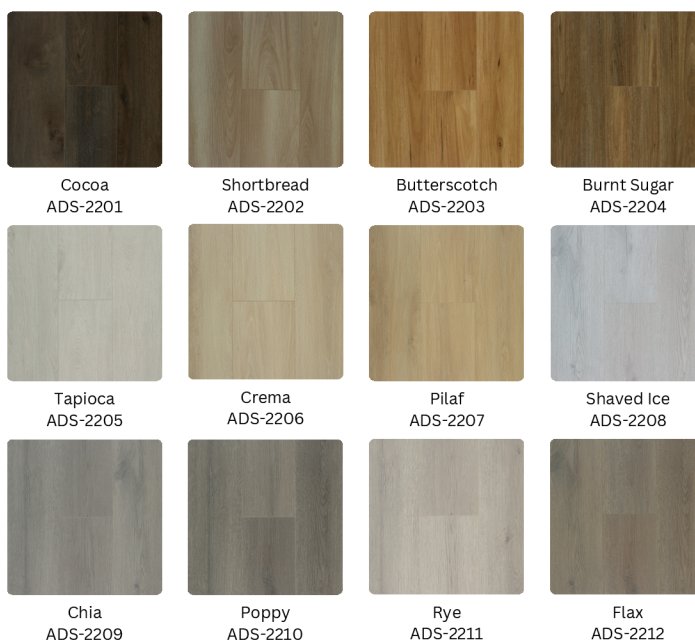

Images are for general illustration only. Actual product colours may differ due to variations in screen displays or printing processes. The scale of the images does not reflect true colour variation. For an accurate representation, please refer to physical samples. Images are not legally binding.

Technical Summary

Abrasion Rating	AC5
Surface Finish	RealFeel Texture Matte
Wear Layer	Multi Layer Aluminium Oxide
Decorative Layer	HD Natural Wood Grain
Pattern Repeats	5 Patterns
Core Structure	High Density Fibreboard
Backing Layer	Moisture Resistant Melamine
Thickness Swelling	≤5 %
Water Resistance	Surface Waterproof
Density	860 kg/m ³
Formaldehyde Test	Method: ASTM D6007-14
Formaldehyde Result	0.06 ppm (per million parts of air)
Environmental	Sourced from sustainable managed resources



This specification data sheet has been prepared by National Select Floors. All information provided was accurate at the time of writing and publication. National Select Floors reserves the right to alter product details at any time without prior notification. Images included are for illustrative purposes only and do not confer any rights or guarantees.

National Select Floors recommends installation by a professional flooring contractor or skilled tradesperson and must follow the Australian Standards for flooring installations. All installations must also be performed in accordance with National Select Floors installation guidelines. If you have any concerns regarding the installation process, please contact your reseller.

Installation guidelines and Warranty information are available from our website.