

SPECIFICATION DATA SHEET

The Herringbone range embodies timeless design and refined craftsmanship, bringing heritage-inspired beauty into modern living spaces. Crafted from sustainably sourced European Oak and select native Australian hardwoods, each piece showcases the natural elegance, strength, and character of genuine timber.

With its classic pattern, the Herringbone design introduces depth, movement, and sophistication, making it the perfect choice for hallways, living areas, and bedrooms. The result is a floor that exudes a high end, architectural feel while retaining warmth and charm.

Finished with subtle matte brushing to enhance natural texture, and protected by multiple layers of UV cured lacquer, the Herringbone range is designed to resist everyday stains and fading. This ensures your floor will retain its flawless elegance for years to come, with minimal upkeep.

Product Details

Style	Herringbone
Timber Origins	European Oak / Australian Species
Thickness / Wear Layer	15 / 3mm
Board Size	600 x 125 mm
Edge Profile	Micro Bevelled
Fitting System	Tongue & Groove
Installation Method	Glue Down only


Sqm/ Box	1.2 m ²
Pieces / Box	16
Weight / Box	11.7 kg

Suitable Application	Residential & Commercial
-----------------------------	--------------------------

Performance & Safety Testing

Slip (AS 4586-2013)	P3 (SRV 36)
Fire (AS ISO 9239.1-2003)	3 kW/m ²
Acoustic Outcome	L _n T _w 38 (Homestead 5 mm rubber)
AAAC Rating	6 Star

Reports are available upon request.

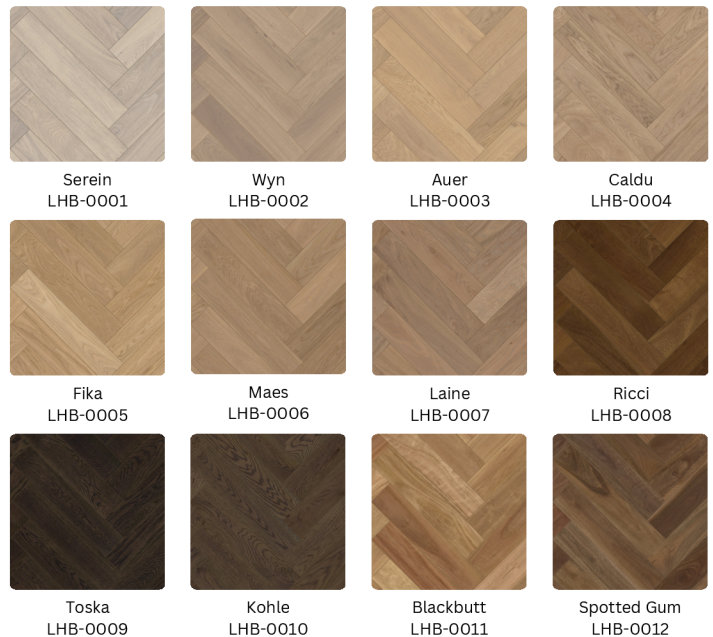

Images are for general illustration only. Actual product colours may differ due to variations in screen displays or printing processes. The scale of the images does not reflect true colour variation. For an accurate representation, please refer to physical samples. Images are not legally binding.

Technical Summary

Grading	Premium Grade
Top Layer	UV Cured Polyurethane Aluminium Oxide Coating
Surface	Pre-finished Matte Lacquer
Finish	Light Wire Brushed Texture
Core Structure	Plantation Eucalyptus/Birch Multi Cross Plywood
Backing Layer	Birchwood Veneer for extra stability
Topcoat Adhesion	4B ASTM D3359
Wear Resistance	≥500 circles (S33 sand paper) ASTM D4060
Moisture Content	6-9%
Gloss Level	6-8°
Density	750 kg/m ³
Janka Hardness Rating	European Oaks: 5.5-6.0 kN Australian Species 9.1-11.0 kN
Formaldehyde Emission	CARB Phase One ≤0.08 ppm ASTM E1333
Environmental	Sourced from sustainable managed resources



Durability

7 coats
UV-hardened
surface finish,
consisting of
polyurethane
and aluminum
oxide

Wearability

3 mm top
layer in solid wood.

Stability

Multiple cross
plywood layers.



This specification data sheet has been prepared by National Select Floors. All information provided was accurate at the time of writing and publication. National Select Floors reserves the right to alter product details at any time without prior notification. Images included are for illustrative purposes only and do not confer any rights or guarantees.

National Select Floors recommends installation by a professional flooring contractor or skilled tradesperson and must follow the Australian Standards for flooring installations. All installations must also be performed in accordance with National Select Floors installation guidelines. If you have any concerns regarding the installation process, please contact your reseller.

Installation guidelines and Warranty information are available from our website.