

SPECIFICATION DATA SHEET

Experience the elegance of European Oak without compromise. Our 14/2 range has been meticulously engineered to combine refined craftsmanship, lasting durability, and accessible pricing; making luxury flooring attainable for every home.

Each sustainably sourced plank is enhanced with a light wire-brushed matte finish that highlights the oak's natural beauty and texture. Multiple layers of advanced UV cured lacquer provide superior resistance to stains and fading, ensuring your floor maintains its flawless appearance with minimal upkeep.

Available in a curated selection of timeless colours, this range delivers sophistication, comfort, and enduring style; all at a price designed to fit your lifestyle.

Product Details


Style	Plank
Timber Origins	European Oak
Thickness / Wear Layer	14 / 2 mm
Board Size	1900 x 190 mm
Edge Profile	Micro Bevelled
Fitting System	Tongue & Groove
Installation Method	Floating Glue Down
Sqm/ Box	2.166 m ²
Pieces / Box	6 rows includes <20% nested
Box / Pallet	50
Weight / Box	19.71 kg

Suitable Application Residential & Commercial

Performance & Safety Testing

Slip (AS 4586-2013)	P3 (SRV 39)
Fire (AS ISO 9239.1-2003)	5 kW/m ²
Acoustic Outcome	L'nTw 37 (Homestead 5 mm rubber)
AAAC Rating	6 Star

Reports are available upon request.

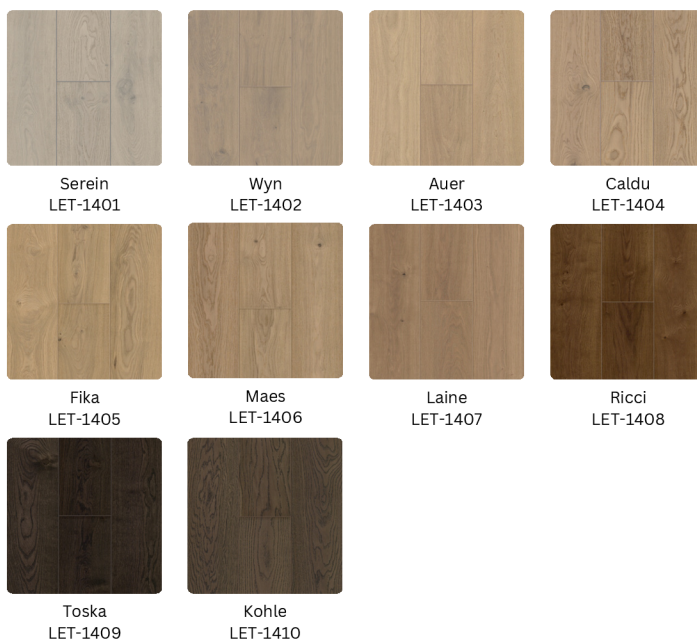

Images are for general illustration only. Actual product colours may differ due to variations in screen displays or printing processes. The scale of the images does not reflect true colour variation. For an accurate representation, please refer to physical samples. Images are not legally binding.

Technical Summary

Grading	ABCD
Top Layer	UV Cured Polyurethane Aluminium Oxide Coating
Surface	Pre-finished Matte Lacquer
Finish	Light Wire Brushed Texture
Core Structure	Plantation Eucalyptus/Birch Multi Cross Plywood
Backing Layer	Birchwood Veneer for extra stability
Topcoat Adhesion	4B ASTM D3359
Wear Resistance	≥500 circles (S33 sand paper) ASTM D4060
Moisture Content	6-9%
Gloss Level	6-8°
Density	750 kg/m ³
Janka Hardness Rating	5.5-6.0 kN
Formaldehyde Emission	CARB Phase One ≤0.08 ppm ASTM E1333
Environmental	Sourced from sustainable managed resources



Durability

Up to 7 coats
UV-hardened
surface finish,
consisting of
polyurethane
and aluminum
oxide

Wearability

Up to 6mm top
layer in solid wood.

Stability

Multiple cross
plywood layers.



This specification data sheet has been prepared by National Select Floors. All information provided was accurate at the time of writing and publication. National Select Floors reserves the right to alter product details at any time without prior notification. Images included are for illustrative purposes only and do not confer any rights or guarantees.

National Select Floors recommends installation by a professional flooring contractor or skilled tradesperson and must follow the Australian Standards for flooring installations. All installations must also be performed in accordance with National Select Floors installation guidelines. If you have any concerns regarding the installation process, please contact your reseller.

Installation guidelines and Warranty information are available from our website.