

SPECIFICATION DATA SHEET

The Caprioni range captures the elegance of classic European design, where the precise symmetry of the chevron pattern creates a sense of movement, balance, and refined luxury. With its distinctive V-shaped formation, Caprioni introduces a bold yet graceful statement, lending interiors a heightened sense of structure and visual sophistication.

Expertly crafted from premium European Oak and engineered with a robust 15 mm profile and three-layer solid wood construction, the Caprioni range provides outstanding stability and long term durability. A matte brushed finish enhances the natural beauty and depth of the oak, while advanced UV-cured lacquer layers protect against everyday wear, staining, and fading; preserving the floor's elegant appearance with minimal maintenance.

Available in a carefully curated palette of contemporary décors, the Caprioni range embodies precision craftsmanship, enduring quality, and timeless European luxury; designed to bring definition, elegance, and architectural presence to interior environments.

Product Details

Style	Chevron
Timber Origins	European Oak
Thickness / Wear Layer	15 / 3 mm
Board Size	520 x 90 mm
Construction	Multi Cross Plywood
Fitting System	Tongue & Groove
Installation Method	Glue Down only


Sqm/ Box	0.749 m ²
Pieces / Box	16 Pieces
Box / Pallet	64
Weight / Box	7.5 kg

Suitable Application	Residential & Commercial
-----------------------------	--------------------------

Performance & Safety Testing

Slip (AS 4586-2013)	P3 (SRV 39)
Fire (AS ISO 9239.1-2003)	5 kW/m ²
Acoustic Outcome	L'nTw 37 (Homestead 5 mm rubber)
AAAC Rating	6 Star

Reports are available upon request.

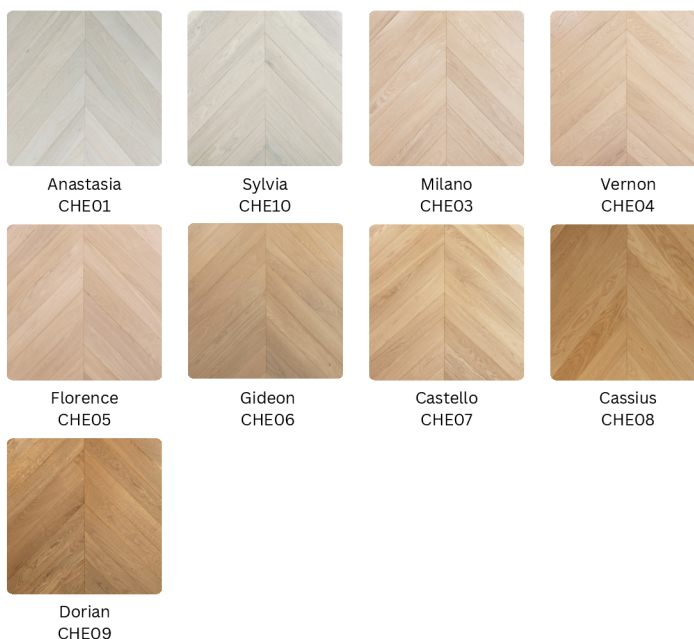

Images are for general illustration only. Actual product colours may differ due to variations in screen displays or printing processes. The scale of the images does not reflect true colour variation. For an accurate representation, please refer to physical samples. Images are not legally binding.

Technical Summary

Grading	Premium Grade
Top Layer	Solid European Oak
Surface Finish	UV Cured Polyurethane Aluminium Oxide Coating
Surface Feel	Light Wire Brushed Texture
Core Board	Plantation Eucalyptus/Birch Multi Cross Plywood
Backing Base	Birchwood Veneer for extra stability
Edge Profile	Micro Bevelled
Wear Resistance	≥ 550 circles (S-33 wheels)
Gloss Retention	Variable measures ±5%
Moisture Content	6-9%
Janka Hardness Rating	5.5-6.0 kN
TVOC	≤ 200ug/m ³
Formaldehyde Emission	≤ 0.08 ppm
Emission of PCP	≤ 5ppm
Environmental	Sourced from sustainable managed resources



Durability

7 coats
UV-hardened
surface finish,
consisting of
polyurethane
and aluminum
oxide

Wearability

3 mm top
layer in solid wood.

Stability

Multiple cross
plywood layers.



This specification data sheet has been prepared by National Select Floors. All information provided was accurate at the time of writing and publication. National Select Floors reserves the right to alter product details at any time without prior notification. Images included are for illustrative purposes only and do not confer any rights or guarantees.

National Select Floors recommends installation by a professional flooring contractor or skilled tradesperson and must follow the Australian Standards for flooring installations. All installations must also be performed in accordance with National Select Floors installation guidelines. If you have any concerns regarding the installation process, please contact your reseller.

Installation guidelines and Warranty information are available from our website.