

SPECIFICATION DATA SHEET

The Velde range stands as a refined expression of our Lamella Engineered Timbers, where generous proportions and considered design come together. Featuring striking 260 mm wide boards, it introduces a sense of openness and continuity, allowing interiors to feel brighter, more expansive, and effortlessly sophisticated.

Constructed with a robust 15 mm profile and a three layer solid wood construction, the Velde range is crafted to deliver both visual impact and reliable stability over time. Its matte brushed surface enhances the organic beauty of European Oak, while multiple layers of UV cured lacquer provide protection against daily wear, staining, and fading. The result is a surface that remains elegant and consistent with minimal maintenance.

Available in a carefully curated selection of contemporary décors, the Velde range reflects elevated craftsmanship, lasting performance, and attainable luxury; designed to bring depth, balance, and refinement to modern spaces.

Product Details

Style	Plank
Timber Origins	European Oak
Thickness / Wear Layer	15 / 4 mm
Board Size	2200 x 260 mm
Construction	Three Layer Solid
Fitting System	Tongue & Groove
Installation Method	Floating Glue Down


Sqm/ Box	2.86 m ²
Pieces / Box	5 rows includes <20% nested
Box / Pallet	40
Weight / Box	22 kg

Suitable Application	Residential & Commercial
-----------------------------	--------------------------

Performance & Safety Testing

Slip (AS 4586-2013)	P3 (SRV 39)
Fire (AS ISO 9239.1-2003)	5 kW/m ²
Acoustic Outcome	L'nTw 37 (Homestead 5 mm rubber)
AAAC Rating	6 Star


Reports are available upon request.

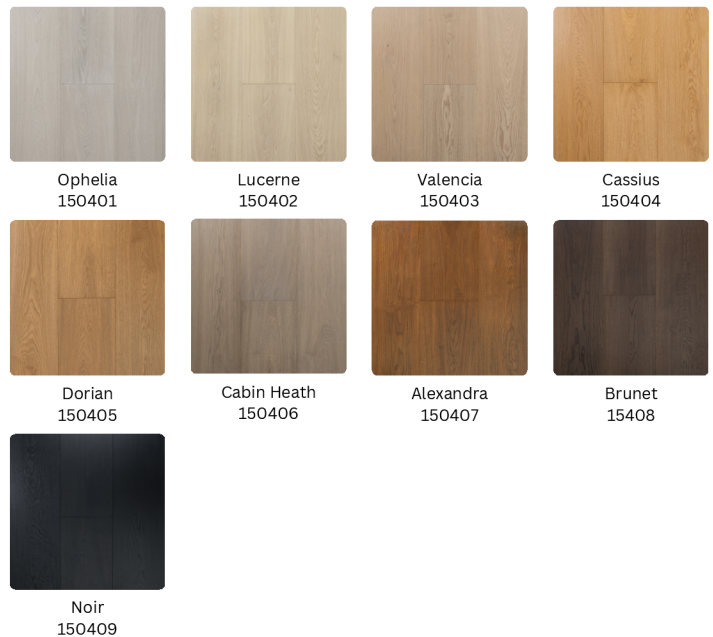

Images are for general illustration only. Actual product colours may differ due to variations in screen displays or printing processes. The scale of the images does not reflect true colour variation. For an accurate representation, please refer to physical samples. Images are not legally binding.

Technical Summary

Grading	Select Natural Grade
Top Layer	Solid European Oak
Core Board	Solid Hardwood Cross Lay
Bottom Layer	Solid Hardwood Veneer
Surface Finish	UV Cured Lacquer UV Oil
Surface Feel	Matte Brushed Texture
Edge Profile	Micro Bevelled
Wear Resistance	≥ 550 circles (S-33 wheels)
Moisture Content	6-9%
Janka Hardness Rating	5.5-6.0 kN
TVOC (C6-C16)	0.061 mg/m ² /hr (ASTM D5116:2025)
Formaldehyde Emission	0.023 mg/m ² /hr (ASTM D5116:2025)
Emission of PCP	≤ 5ppm
Environmental	Sourced from sustainable managed resources

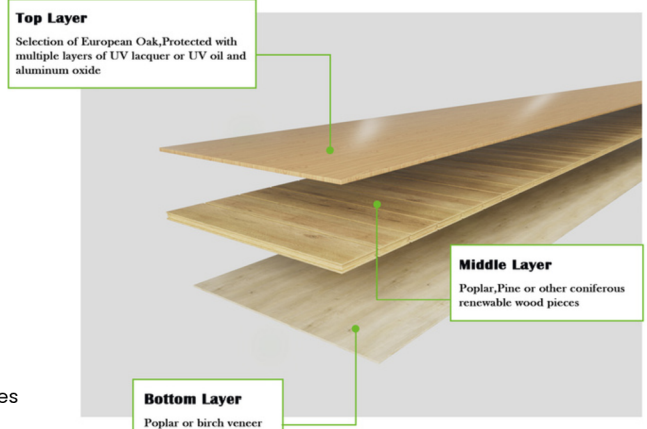

This specification data sheet has been prepared by National Select Floors. All information provided was accurate at the time of writing and publication. National Select Floors reserves the right to alter product details at any time without prior notification. Images included are for illustrative purposes only and do not confer any rights or guarantees.

National Select Floors recommends installation by a professional flooring contractor or skilled tradesperson and must follow the Australian Standards for flooring installations. All installations must also be performed in accordance with National Select Floors installation guidelines. If you have any concerns regarding the installation process, please contact your reseller.

Installation guidelines and Warranty information are available from our website.