

SPECIFICATION DATA SHEET

Stonegrove Luxury Hybrids is a premium flooring product, expertly crafted to combine performance, style, and sustainability; offering exceptional quality at a competitive price. Featuring a 0.55mm wear layer and the ever-reliable Uniclic locking system, this range delivers lasting durability with effortless installation.

Stonegrove Luxury Hybrids offers an authentic timber look and feel, available in a wide selection of stunning colours to suit any interior style. The range includes long planks in 6.5mm and 8mm thickness options, as well as a stylish herringbone design; giving you flexibility to create your ideal aesthetic.

Engineered for long-lasting wear, dimensional stability, and optimal water resistance, this flooring is ideal for both residential and commercial environments.

As a mark of its commitment to quality and sustainability, Stonegrove Luxury Hybrids is certified compliant with Best Environmental Practice PVC 2.0 Guidelines by Bureau Veritas; offering peace of mind along with premium performance.

Product Details

Board Style	Plank
Board Thickness	6.5 mm
Board Size	1800 x 226 mm
Edge Profile	Micro Bevelled
Locking System	Uniclic
Installation Method	Floating only


Sqm/ Box	2.44 m ²
Pieces / Box	6
Box / Pallet	52
Weight / Box	27 kg

Suitable Application	Residential & Commercial
-----------------------------	--------------------------

Performance & Safety Testing

Slip (AS 4586-2013)	P3 (SRV 36)
Fire (AS ISO 9239.1-2003)	10.7 kW/m ²
Acoustic Outcome	L'nTw 42
AAAC Rating	5 Star


Reports are available upon request.

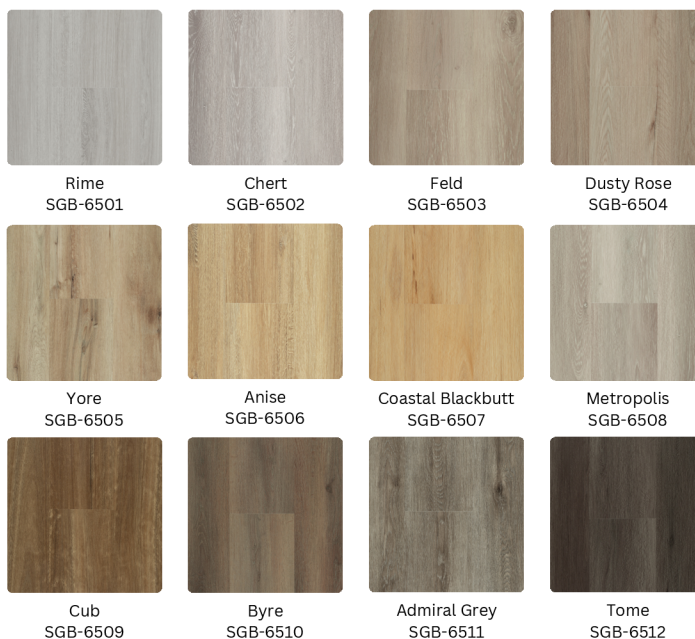

Images are for general illustration only. Actual product colours may differ due to variations in screen displays or printing processes. The scale of the images does not reflect true colour variation. For an accurate representation, please refer to physical samples. Images are not legally binding.

Technical Summary

Top Wear Layer	0.55 mm
Water Resistance	Waterproof
Surface Finish	Matte
Wear Layer	UV Protect Anti-slip Coating
Decorative Layer	HD Wood Grain Embossed (EIR)
Core Structure	Stone Polymer Composite (SPC)
Backing Layer	1.5 mm IXPE Acoustic Underlay
Density	408 kg/m ²
Formaldehyde Test	Chamber value: 0.006 mg HCHO/m ³ of air
TVOC Range	PASS ≤0.5 mg/m ³
Environmental	Sourced from sustainable managed resources
Certificate of Compliance	Bureau Veritas - Best Environmental Practice PVC 2.0

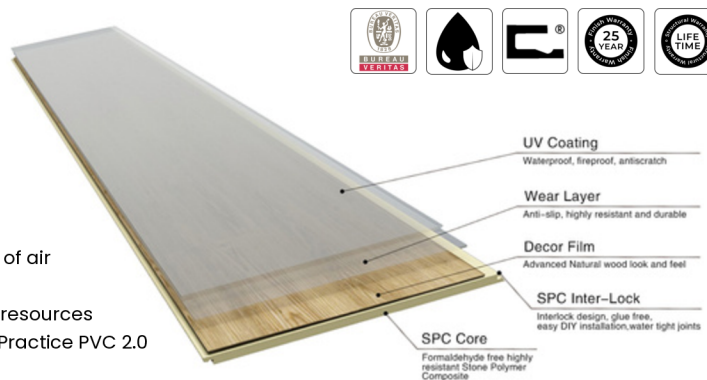

This specification data sheet has been prepared by National Select Floors. All information provided was accurate at the time of writing and publication. National Select Floors reserves the right to alter product details at any time without prior notification. Images included are for illustrative purposes only and do not confer any rights or guarantees.

National Select Floors recommends installation by a professional flooring contractor or skilled tradesperson and must follow the Australian Standards for flooring installations. All installations must also be performed in accordance with National Select Floors installation guidelines. If you have any concerns regarding the installation process, please contact your reseller.

Installation guidelines and Warranty information are available from our website.